




- Eurovent Certified Performance
- Capacity Range: 800 CFM - 2200 CFM
- 4 speed motor




- LHS / RHS coil connections
- Relatively low noise operation
- Electric Heater option available

### Long Length Duct

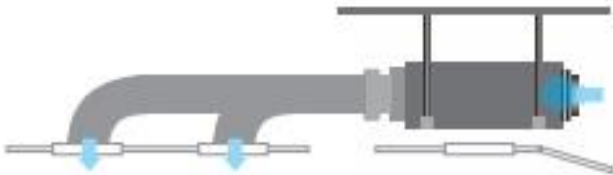

### Pre-fitted Valve Station

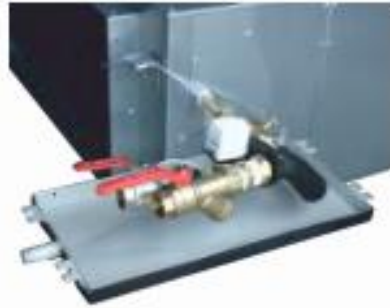

## High Static Fan Coil Units

			Eurovent Certified						
Model			MKT3H-800G70	MKT3H-1000G70	MKT3H-1200G70	MKT3H-1400G70	MKT3H-1600G100	MKT3H-1800G100	MKT3H-2200G100
Airflow	(H/M/L)	CMH	1360/1220/1090	1700/1530/1380	2040/1880/1610	2380/2120/1860	2720/2450/2170	3060/2750/2450	3740/3360/2990
Cooling Capacity	(H/M/L)	kW	6.6/6.37/6.12	8.8/8.19/7.57	10/9.44/8.53	12/11.47/10.24	14.1/13.03/11.87	15.8/14.6/13.46	19.9/18.58/17.24
Power Supply		V/Ph/Hz	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50
Power Input	(H)	W	350	350	350	350	550	800	950
Noise Level (NC)	(H/M/L)		49/42/35	50/43/36	51/44/37	52/45/38	54/47/40	60/53/46	61/54/47
Indoor Unit Dimensions	WxHxD	mm	946x400x816	946x400x816	946x400x816	946x400x816	1290x400x809	1290x400x809	1290x400x809